



Designed as a range of general purpose enclosures packed with features.


Widely used in industry, contractors , municipalities, utilities and OEM's for various applications:

- Electrical reticulation
- Water reticulation
- Industrial applications
- Original equipment manufacturers
- Processing plants
- Pulp/ Paper
- Agriculture
- Petro chemical plants(non certified areas)

Specifications	Features
<ul style="list-style-type: none"> • Meeting the requirement SANS IEC6062208 and SANS IEC60670 • Manufactured from glassfilled reinforced polyester • Thermo set Glow wire temperature 960° C • Shock resistant up to 8 Joules (1K08) • UV resistant (20 Years +) • Dimension stability from -50° C up to +150° C • IP54 for slide lid application • IP65 for screw lid application • Chemical resistant (water,salt,solutions,acids, bases,mineral oils) 	<ul style="list-style-type: none"> • Standard colour is RAL 7035 electrical grey • Optional colour changes for various requirements are available based on additional costing and a minimum quantity level per order • Polyurethane seals for screw lids • Securing points are external for added ingress protection • Screw and slide lid options • External mounting feet standard across the entire range • Galvanised metal device plates are an option on the entire range. Not included in standard delivery.



Description	Part Number
UT Mounting Feet	UT-MF
UT4 Shroud Kit	UT4-DIN
UT4 Shroud 6 Way Samite	UT4-SAM
UT6 Shroud 8 Way Din	UT6-DIN
UT-6 Shroud 11 Way Samite	UT6-SAM
UT10 Shroud 24 Way Din	UT10-DIN
UT10 Shroud 32 Way Samite	UT10-SAM

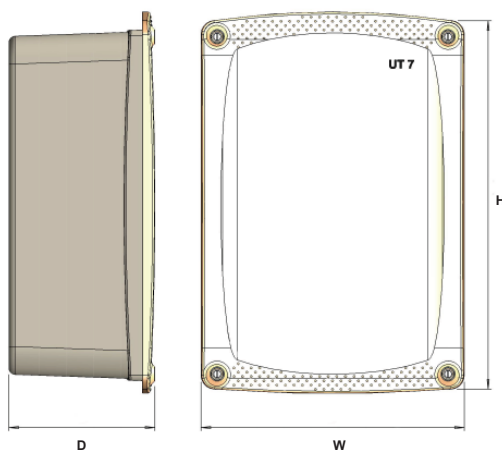

Product Name	Dimensions in mm			Screw Lid IP66	Slide Lid IP54	Per Box	Device Plate Sold Separately
	H	W	D	Part Number	Part Number	Qty	Part Number
UT1	80	80	60	040-751	040-752	10	DEV-UT1
UT2	110	110	90	040-655	040-714	9	DEV-UT2
UT3	160	110	90	040-670	040-715	8	DEV-UT3
UT4	210	160	90	040-656	040-716	8	DEV-UT4
UT4 -D	211	160	180	040-753	040-761	6	DEV-UT4
UT5	210	210	125	040-657	040-717	6	DEV-UT5
UT6	260	210	125	040-658	040-718	4	DEV-UT6
UT7	310	210	125	040-671	040-719	4	DEV-UT7
UT8	310	260	165	040-672	040-720	2	DEV-UT8
UT9	310	310	165	040-673	040-721	2	DEV-UT9
UT10	410	410	165	040-674	040-722	2	DEV-UT10