

Utilec

Standard General Purpose Polyester Enclosures (GRP)



Enclosures

MATERIAL	DMC (Dough Moulding Compound)			
OPERATING TEMPERATURE	-50° C to + 200° C			
GLOW WIRE CAPABILITY / FLAMMABILITY	960° / UL94 V0			
EXPECTED UV LIFE (DIRECT EXPOSURE)	25 years +			
IP LEVEL	IP54 for slide lid application, IP65 for screw lid application			
SECURITY LEVEL	1	2	3	4
ENVIRONMENT (INDOOR/OUTDOOR)	Indoor and Outdoor use			

Hinges

Locks

Handles

Accessories



Rotary Operating Handles

Insulators

Transformer Equipment




Index

Note: Why slide lid? No gasket is used, so less chance of deterioration over several operations. Lifespan of IP level is increased.



Description	Part Number
UT Mounting Feet	UT-MF
UT4 Shroud Kit	UT4-DIN
UT4 Shroud 6 Way Samite	UT4-SAM
UT6 Shroud 8 Way Din	UT6-DIN
UT-6 Shroud 11 Way Samite	UT6-SAM
UT10 Shroud 24 Way Din	UT10-DIN
UT10 Shroud 32 Way Samite	UT10-SAM

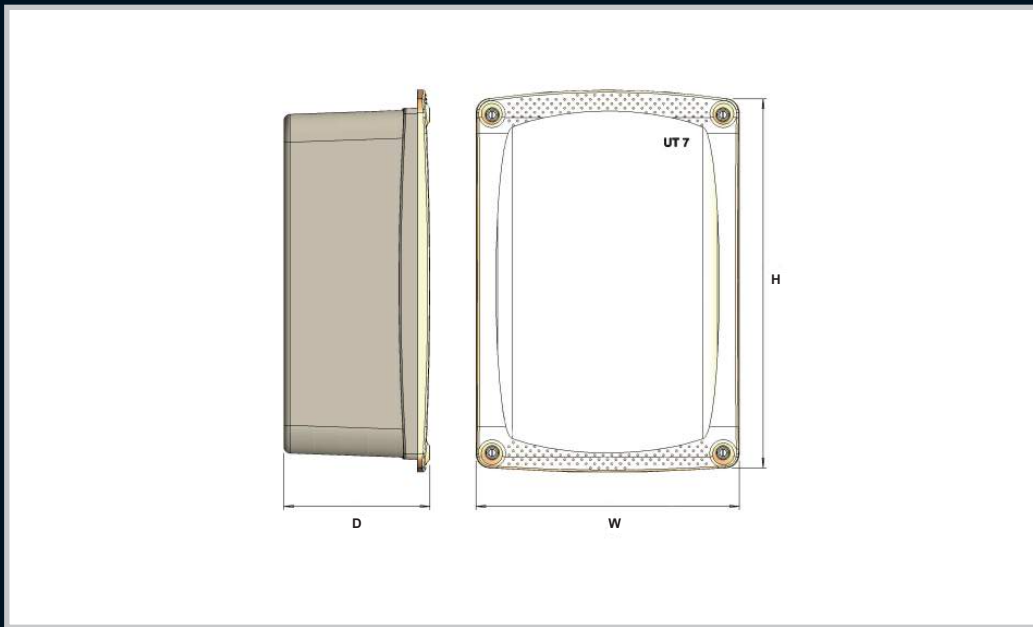

Product Name	External Dimensions (mm)			Internal Dimensions (mm)			Screw Lid IP66	Slide Lid IP54	Per Box	Device Plate Sold Separately
	H	W	D	H1	W1	D1	Part Number	Part Number	Qty	Part Number
UT1	80	80	60	122	110	70	040-751	040-752	10	DEV-UT1
UT2	110	110	90	155	144	100	040-655	040-714	9	DEV-UT2
UT3	160	110	90	204	144	100	040-670	040-715	8	DEV-UT3
UT4	210	160	90	253	194	100	040-656	040-716	8	DEV-UT4
UT4 -D	211	160	180	253	194	186	040-753	040-761	6	DEV-UT4
UT5	210	210	125	257	246	136	040-657	040-717	6	DEV-UT5
UT6	260	210	125	307	246	136	040-658	040-718	4	DEV-UT6
UT7	310	210	125	357	246	136	040-671	040-719	4	DEV-UT7
UT8	310	260	165	359	298	176	040-672	040-720	2	DEV-UT8
UT9	310	310	165	359	348	176	040-673	040-721	2	DEV-UT9
UT10	410	410	165	459	448	176	040-674	040-722	2	DEV-UT10

Enclosures

Hinges

Locks

Handles

Accessories

Rotary Operating
Handles

Insulators

Transformer
Equipment

Index