


24Kv Outdoor Immersed Bushings

DL = Draw Lead
DL+T = Draw Lead + Tail



PART NUMBER	DESCRIPTION	Kv RATING	CURRENT RATING	TANK HOLE SIZE	CREEPAGE PER Kv (mm)
040-331	SG250	24	250	90	31
040-353	SGF250 DL	24	30	80	31
040-353/R	SGF250 DL + T	24	30	80	31
040-355	SGF250 Solid	24	250	80	31

36Kv Outdoor Immersed Bushings

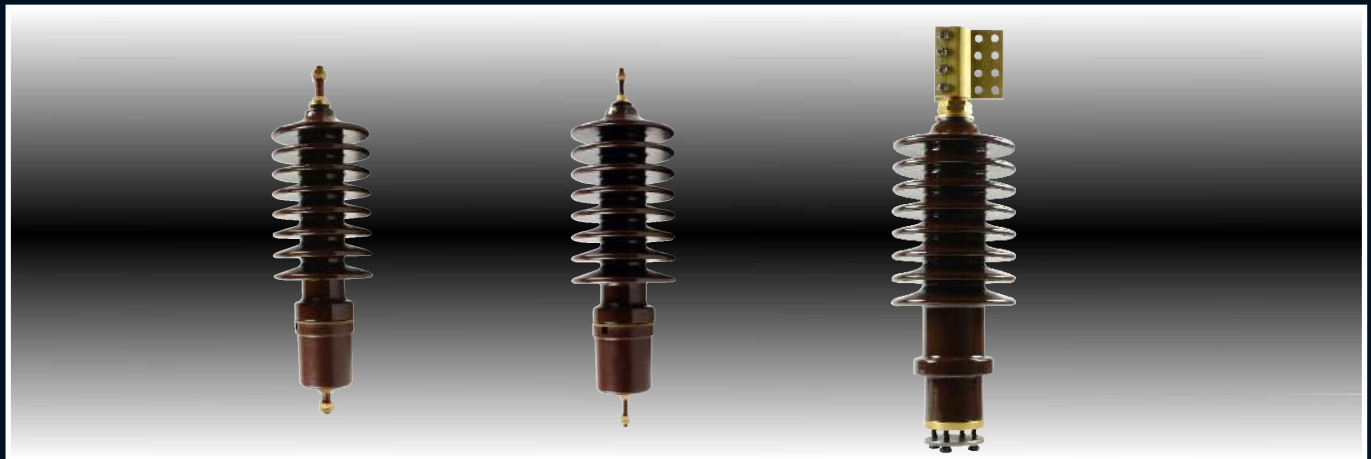

PART NUMBER	DESCRIPTION	Kv RATING	CURRENT RATING	TANK HOLE SIZE	CREEPAGE IN mm PER Kv
040-222	LH250 DL + T	36	30	90	31
040-221	LHC250	36	250	90	31
040-341	LH630	36	630	90	31
040-342	LHC630	36	630	90	31
040-544	LH1250 Long DL	36	630	117	31
040-541	LH1250 Long	36	1250	117	31
040-545	LH1250 Long SR	36	1250	117	31
040-546	LH2500 Long DL	36	630	117	31
040-540	LH2500 Long	36	2500	117	31
040-547	LH2500 Long SR	36	2500	117	31
040-362	LJ250	48	250	90	31

* **Note: Detailed drawings available on request**