


## AU HC Bushing Range

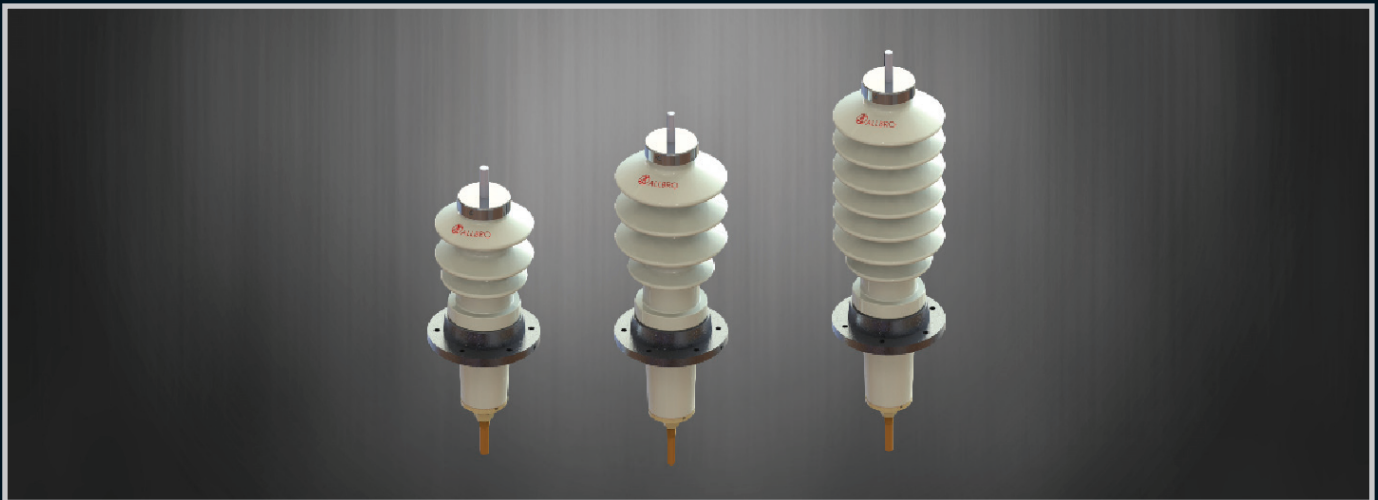

Part Number	Description	U.m (kV)	Ir (A)	Tank Hole Size (mm)	LI (kV)	ACSD (kV)	CD (mm)	Stem Thread Size	Stem Pitch (mm)	Recommended Stem Torque (N.m)
040-404/X20	AU 12K-800 3S HC Bushing	12kV	800	120	95	28	470	M20	2	100
040-404/X24	AU 12K-1050 3S HC Bushing	12kV	1050	120	95	28	470	M24	2	120
040-405/X20	AU 24K-800 4S HC Bushing	24kV	800	120	150	50	670	M20	2	100
040-405/X24	AU 24K-1050 4S HC Bushing	24kV	1050	120	150	50	670	M24	2	120
040-406/X20	AU 36K-800 7S HC Bushing	36kV	800	120	200	70	1200	M20	2	100
040-406/X24	AU 36K-1050 7S HC Bushing	36kV	1050	120	200	70	1200	M24	2	120

**\* Note:**  
**Detailed drawings available on request**  
**Tank wall thickness minimum 3mm , maximum 6mm**  
**Tank hole size tolerance is -0mm +1mm**

Enclosures

Hinges

Locks

Handles

Accessories

Rotary Operating Handles

Insulators

Transformer Equipment

Index